



LED SPOTLIGHT. OLE BL D100

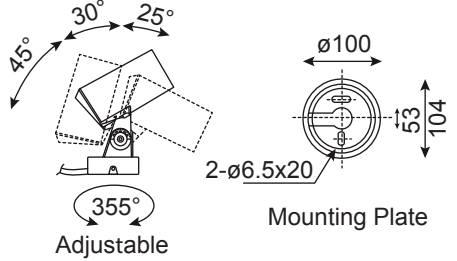

OLE BL D100				
Code	OLE BL 0125D100	OLE BL 0604D100A	OLE BL 0603D100	OLE BL 0604D100B
Power	LED 1*25W	LED 6*4W	LED 6*3W	LED 6*4W
LED Brand	CREE 1820 COB	CREE-XP-G2	EPISTAR	EPISTAR
Color	3000K~6000K	3000K~6000K	RGBW 3in1 DMX512	RGBW 4in1 DMX512
Beam Angle	18°/24°/38°/60°	6°/12°/25°/40°/60°	15°/30°/45°/60°	15°/30°/45°/60°
Input Voltage	AC240V/DC24V	AC240V/DC24V	DC24V	DC24V

- Protection : IP66
- Impact Protection : IK08
- Color Rendering Index (CRI) : >80/90
- Material : Die-Cast Aluminium
- Connector : IP68 Connector

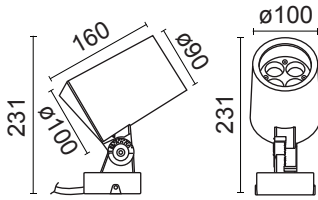

Optional Applications

Spike+Pole	Pole	Spike	Pole Mounting	Tree Ring



Optical Accessories



*All LED lighting can refer SPD specifications page 88