

## ARIA

■ Grey



OLE ARIA S



OLE ARIA M

IP65

220V  
240V

CRI  
>70

MADE IN  
MALAYSIA



### Features

Lumen Maintenance : L90 @ 60,000 hours  
 Working Temperature : -40°C ~ 50°C  
 Storage Temperature : -20°C ~ 80°C  
 Power Factor : >0.95 at Full Load  
 THD : <20% at Full Load

### Material

Casing : Extrusion aluminum AA 6063-T5 with outdoor epoxy powder coated  
 Cover : Acrylic  
 Flange Plate: Stainless Steel  
 Dimming : (Optional) 0-10V / DALI / Timer

### Advantages

This bollard's light distribution is forward projecting, and therefore provides an excellent solution.


### Application

Applicable for Illuminating Pathways, Driveways, Car Park, Garden Lighting, Area Lighting and etc.

## Specifications

Model No.	Power	Lamp	Input current	Weight	Color	Efficacy	Lumen
OLE ARIA S	9W	LED	0.03A	6.05kg	3500K-6000K	80 lm/W	720 lm
OLE ARIA M	15W	LED	0.06A	6.05kg	3500K-6000K	80 lm/W	1200 lm



## Photometric Data

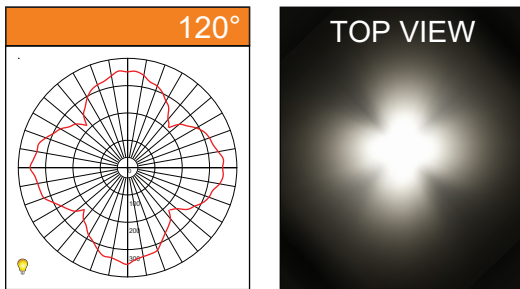

**Feature Diagram**



Casing material  
Extrusion Aluminum AA 6063-T5 with  
Outdoor Epoxy Powder Coated



4 Sided Light Emitting Surface



Landscape Lighting

**Dimension**

OLE ARIA S	OLE ARIA M
<p>Wrapping Size: 1015x142x142</p> <p>(4 Sided Light Emitting Surface)</p>	<p>Wrapping Size: 1015x142x142</p> <p>(4 Sided Light Emitting Surface)</p>