


OLE can provide 7-10 years warranty

# OLE FLEXI MINI

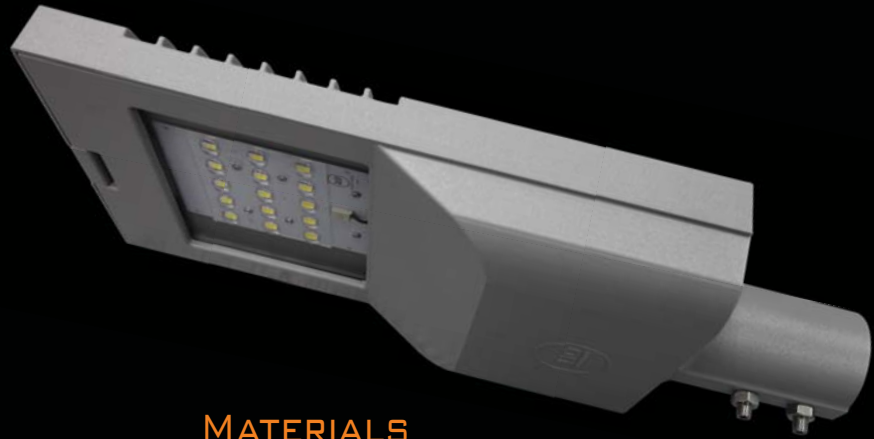

## FEATURES

- Input voltage: 220V~240V / Universal input
- Lumen Maintenance: L80 @ 50,000 hours
- Working Temperature: -25°C ~ 50°C
- Storage Temperature: -25°C ~ 80°C
- Power Factor: >0.95 at Full Load

## MATERIALS

- Casing material: Die-Cast Aluminum  
ADC12, Powder-Coated Finishing
- Cover: Tempered Glass
- Driver: Dimmable, Programmable  
& DALI Compatible 1~10V (Optional)
- NEMA Socket: Support NEMA 7 pin (Optional)



IP  
65

CRI  
>70-80

THD  
5-10%

5  
years  
warranty


SIRIM

## Specification

Model No.	Power	Input current	Weight	CCT	Efficacy	Lumen
OLE Flexi Mini B30	30W	0.13A	3.4kg	<3500K	111 lm/W	3330 lm
				4000K	116 lm/W	3480 lm
				5000K	115 lm/W	3450 lm
				6000K	114 lm/W	3420 lm
OLE Flexi Mini B40	40W	0.17A	3.6kg	<3500K	111 lm/W	4440 lm
				4000K	116 lm/W	4640 lm
				5000K	115 lm/W	4600 lm
				6000K	114 lm/W	4560 lm
OLE Flexi Mini B55	55W	0.23A	3.6kg	<3500K	111 lm/W	6105 lm
				4000K	116 lm/W	6380 lm
				5000K	115 lm/W	6325 lm
				6000K	114 lm/W	6270 lm
OLE Flexi Mini B70	70W	0.30A	3.7kg	<3500K	111 lm/W	7770 lm
				4000K	116 lm/W	8120 lm
				5000K	115 lm/W	8050 lm
				6000K	114 lm/W	7980 lm
OLE Flexi Mini B80	80W	0.34A	4.1kg	<3500K	114 lm/W	9120 lm
				4000K	119 lm/W	9520 lm
				5000K	118 lm/W	9440 lm
				6000K	117 lm/W	9360 lm

\*Flux data based on  $T_a = 35^\circ\text{C}$ , CCT & Lumen + - 10%

## Photometric Data

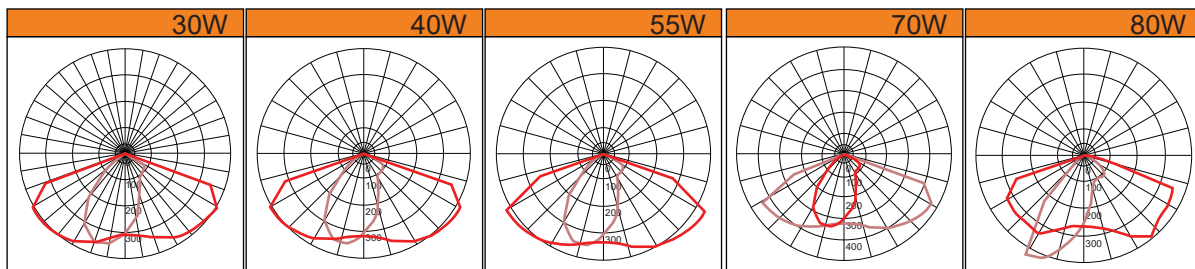

## OLE FLEXI MINI



\* Luminaire with 42mm spigot to be mounted onto  $\phi 28\text{mm}$  -  $\phi 36\text{mm}$  pole spigot.

\* Luminaire with 60mm spigot to be mounted onto  $\phi 42\text{mm}$  -  $\phi 50\text{mm}$  pole spigot.

# Construction of OLE FLEXI MINI



LED Modules




Spigot 42mm  
(60mm optional)

4 ————○  
Smart control for dimming  
NEMA socket : Support  
NEMA 7 pin, ZIGBEE, PLC,  
LORA smart lighting system  
(optional).

5 ————○  
IP65 protection  
compartment

6 ————○  
Interchangable  
spigot

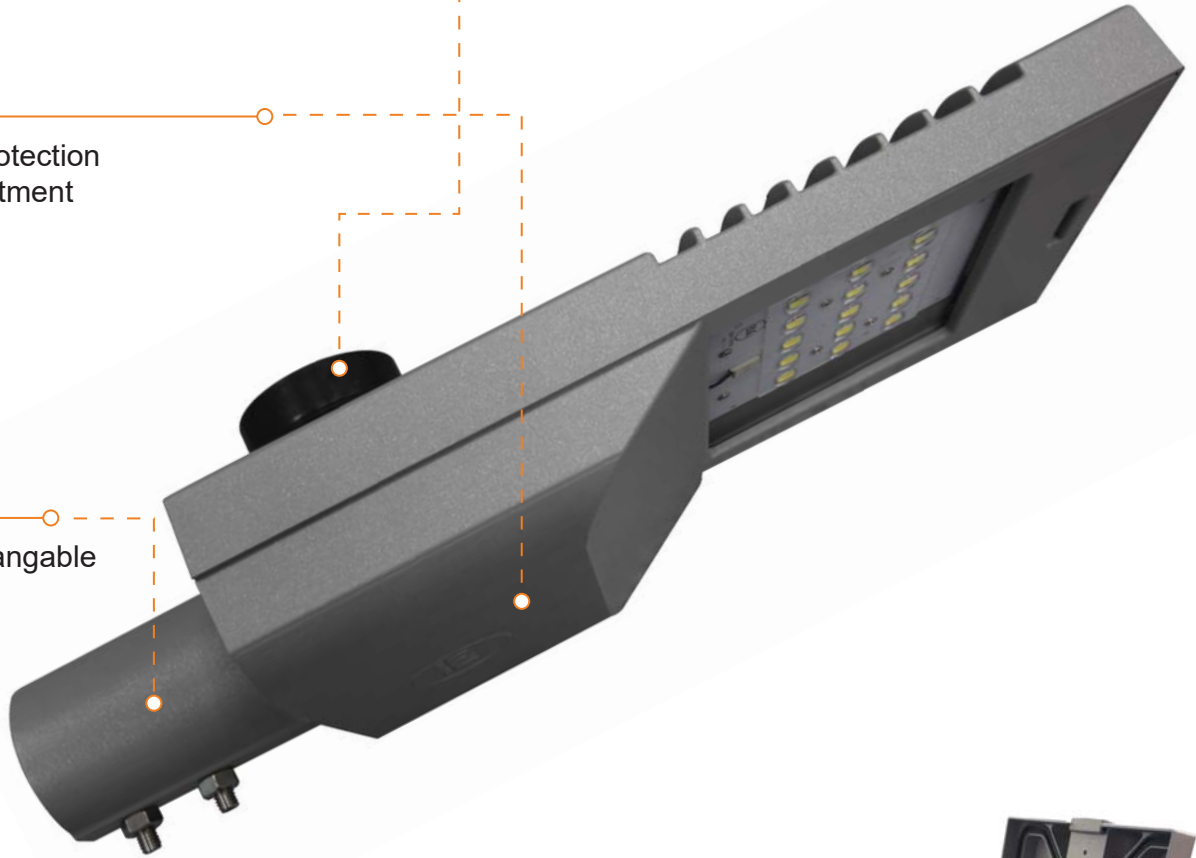

NEMA Socket  
(Optional)



Gear Compartment

