

## DURA CRL

■ Grey



IP66

IK09

220V  
240V

CRI  
>70



### Features

Lumen Maintenance : L90 @ 70,000 hours  
Working Temperature : -25°C ~ 50°C  
Storage Temperature : -25°C ~ 80°C  
Power Factor : >0.95 at Full Load  
THD : <20% at Full Load  
IP Protection : IP66 Optical Compartment

### Material

Casing : High Purity Extrusion Aluminium & Galvanized Steel with Polyester Epoxy Powder Coated Finishing  
Cover : 5mm Tempered Glass  
Bracket : Stainless Steel  
Dimming : (Optional) 1-10V / DALI / Timer

### Advantages

- Robust and able to use for outdoor application.
- Ring outfit mounting method for easy installation at high mounting areas.

### Application


Applicable for High Ceiling Corridor, Multipurpose Hall, Warehouse and Factories.

## Specifications



Model No.	Power	Input current	Weight	CCT	Efficacy	Lumen
OLE DURA CRL90	90W	0.39A	7.9kg	<3500K	134 lm/W	12060 lm
				4000K	140 lm/W	12600 lm
				5000K	142 lm/W	12780 lm
				6000K	142 lm/W	12780 lm
OLE DURA CRL120	120W	0.52A	7.9kg	<3500K	124 lm/W	14880 lm
				4000K	130 lm/W	15600 lm
				5000K	132 lm/W	15840 lm
				6000K	132 lm/W	15840 lm
OLE DURA CRL150	150W	0.65A	13.7kg	<3500K	137 lm/W	20550 lm
				4000K	143 lm/W	21450 lm
				5000K	145 lm/W	21750 lm
				6000K	145 lm/W	21750 lm
OLE DURA CRL180	180W	0.78A	13.7kg	<3500K	134 lm/W	24120 lm
				4000K	140 lm/W	25200 lm
				5000K	142 lm/W	25560 lm
				6000K	142 lm/W	25560 lm
OLE DURA CRL240	240W	1.04A	13.7kg	<3500K	123 lm/W	29520 lm
				4000K	128 lm/W	30720 lm
				5000K	130 lm/W	31200 lm
				6000K	132 lm/W	31680 lm
OLE DURA CRL300	300W	1.30A	17kg	<3500K	132 lm/W	39600 lm
				4000K	139 lm/W	41700 lm
				5000K	141 lm/W	42300 lm
				6000K	141 lm/W	42300 lm

\* Flux data based on Luxeon 5050 LED, Ta = 25°C & CCT & Lumen +/-10%.

## Photometric Data

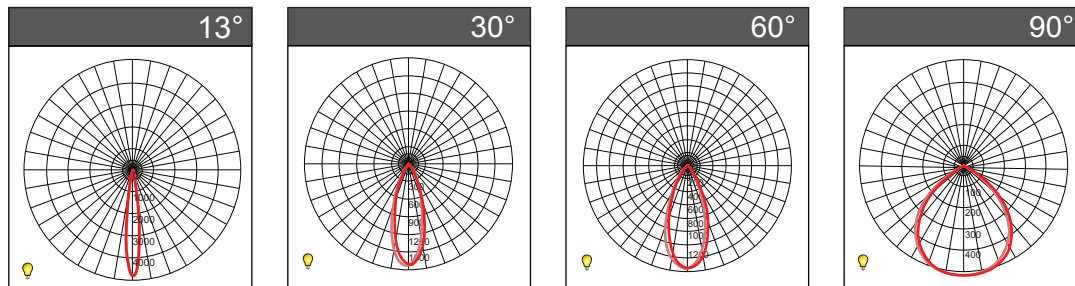

**Feature Diagram**

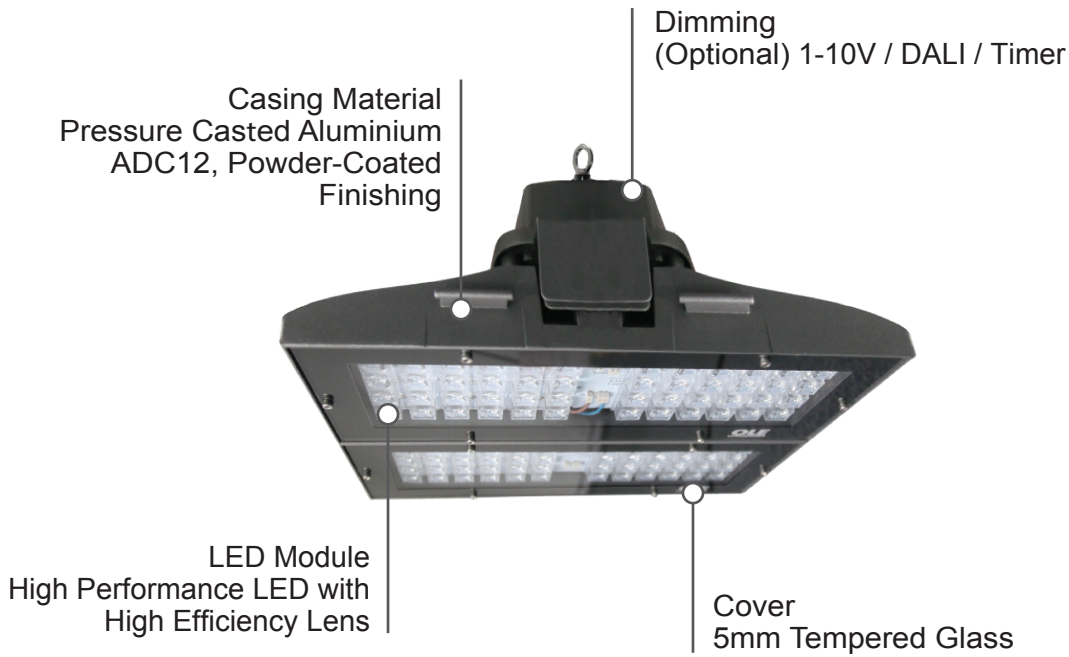

LED Module




Ring Outfit Mounting

**Dimensions**


**OLE DURA CRL90 / OLE DURA CRL120**

Carton Size: (L)245x(W)485x(H)245

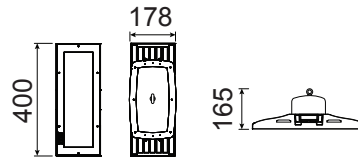

**OLE DURA CRL150 / OLE DURA CRL180 / OLE DURA CRL240**

Carton Size: (L)498x(W)448x(H)236

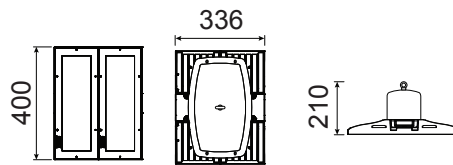

**OLE DURA CRL300**

Carton Size: (L)542x(W)482x(H)245

