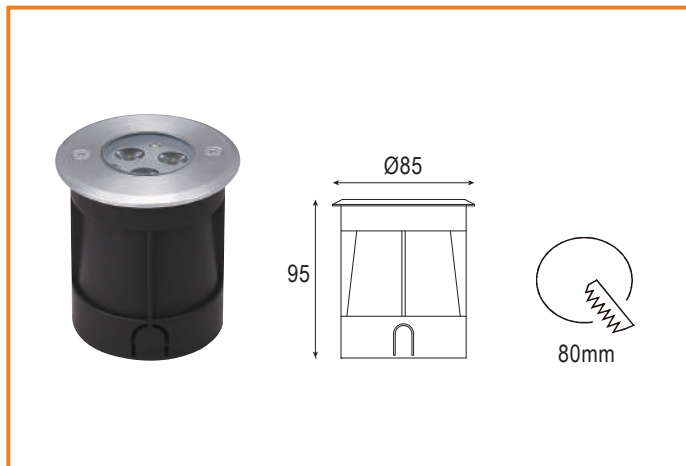
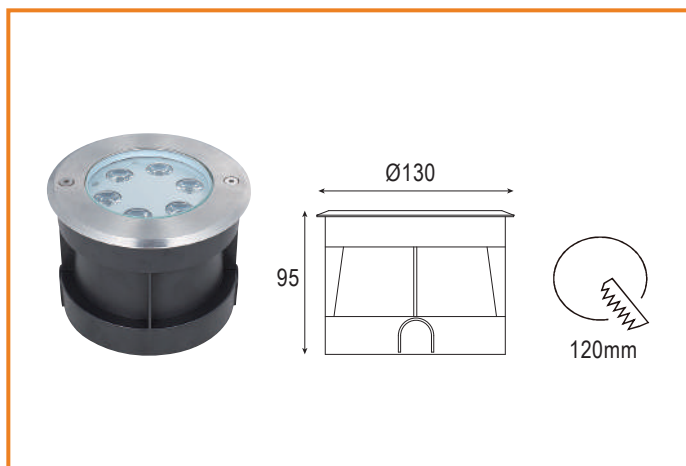
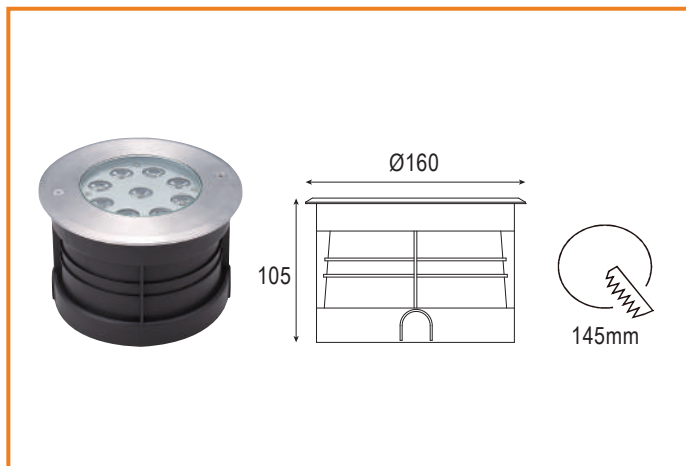


**OLE-D871301**

Power	3W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	3
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

**OLE-D871303**

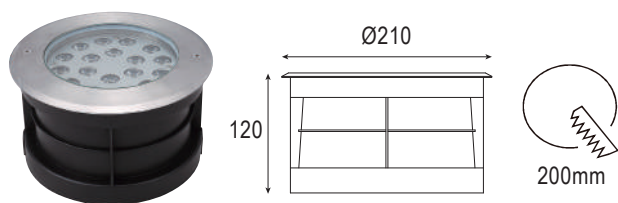
Power	6W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	6
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

**OLE-D871304**

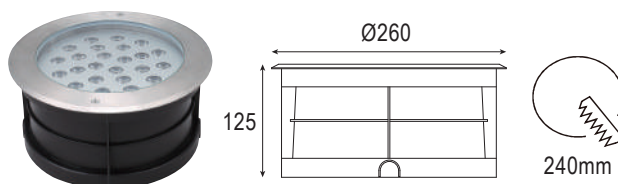
Power	9W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

**OLE-D871305**

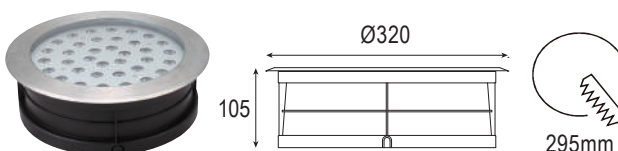
Power	12W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

**OLE-D871306**

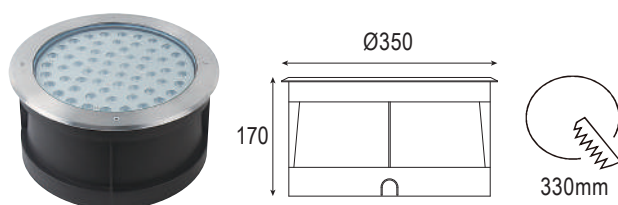
Power	18W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	18
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

**OLE-D871308**

Power	24W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	24
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

**OLE-D871309**

Power	36W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	36
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

**OLE-D871310**

Power	60W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	60
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve