

ALBE

■ Grey



IP65    220V  
240V    CRI  
>70    MADE IN  
MALAYSIA

### Features

Lumen Maintenance : L90 @ 60,000 hours  
 Working Temperature : -40°C ~ 50°C  
 Storage Temperature : -20°C ~ 80°C  
 Power Factor : >0.95 at Full Load  
 THD : <20% at Full Load

### Material

Casing : Extrusion aluminum AA 6063-T5 with outdoor epoxy powder coated  
 Cover : Acrylic  
 Flange Plate: Stainless Steel  
 Dimming : (Optional) 0-10V / DALI / Timer

### Advantages

Attractive rectangular bollards that provides excellent glare control.


### Application

Applicable for Pedestrian Walkway, Car Park, Garden Lighting, Area Lighting and others.

### Specifications

Model No.	Power	Lamp	Input current	Weight	Color	Efficacy	Lumen
OLE ALBE	30W	LED	0.13A	7.7kg	3500K-6000K	80 lm/W	2400 lm



### Photometric Data

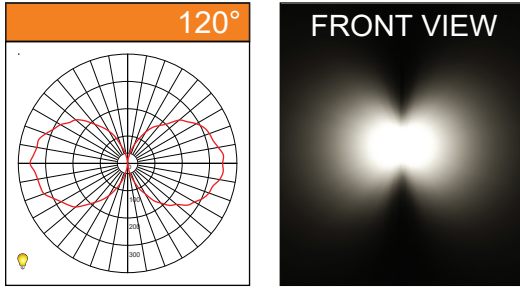

Feature Diagram



Casing material  
Extrusion Aluminum AA 6063-T5 with  
Outdoor Epoxy Powder Coated

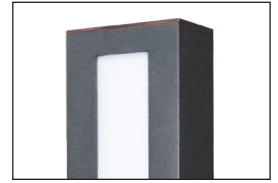

Front & Back Light  
Emitting Surface



Dimension

