

OLE can provide 7-10 years warranty

OLE FLEXI ST



FEATURES

- Input voltage: 220V~240V / Universal input
- Lumen Maintenance: L90 @ 100,000 hours
- Working Temperature: -25°C ~ 50°C
- Storage Temperature: -25°C ~ 80°C
- Power Factor: >0.95 at Full Load

MATERIALS

- Casing material: Die-Cast Aluminum
ADC12, Powder-Coated Finishing
- Cover: 5mm Tempered Glass
- Driver: Dimmable, Programmable
& DALI Compatible 1~10V (Optional)
- NEMA Socket: Support ZHAGA, NEMA, ZIGBEE,
PLC, LORA Smart Lighting System (Optional)











Specification



Model No.	Power	Input current	Weight	Lantern Size	CCT	Efficacy	Lumen
OLE Flexi ST70	70W	0.30A	7.0kg	320 x 562mm	<3500K	163 lm/W	11410 lm
					4000K	165 lm/W	11550 lm
					5000K	167 lm/W	11690 lm
					6000K	169 lm/W	11830 lm
OLE Flexi ST75	75W	0.32A	7.8kg	320 x 562mm	<3500K	163 lm/W	12225 lm
					4000K	165 lm/W	12375 lm
					5000K	167 lm/W	12525 lm
					6000K	169 lm/W	12675 lm
OLE Flexi ST90	90W	0.39A	7.8kg	320 x 562mm	<3500K	169 lm/W	15210 lm
					4000K	171 lm/W	15390 lm
					5000K	173 lm/W	15570 lm
					6000K	175 lm/W	15750 lm
OLE Flexi ST100	100W	0.43A	7.8kg	320 x 562mm	<3500K	167 lm/W	16700 lm
					4000K	169 lm/W	16900 lm
					5000K	171 lm/W	17100 lm
					6000K	173 lm/W	17300 lm
OLE Flexi ST120	120W	0.52A	8.0kg	320 x 562mm	<3500K	172 lm/W	20640 lm
					4000K	174 lm/W	20880 lm
					5000K	176 lm/W	21120 lm
					6000K	178 lm/W	21360 lm
OLE Flexi ST150	150W	0.65A	8.0kg	320 x 562mm	<3500K	169 lm/W	25350 lm
					4000K	171 lm/W	25650 lm
					5000K	173 lm/W	25950 lm
					6000K	175 lm/W	26250 lm
OLE Flexi ST180	180W	0.78A	8.0kg	320 x 562mm	<3500K	174 lm/W	31320 lm
					4000K	176 lm/W	31680 lm
					5000K	178 lm/W	32040 lm
					6000K	180 lm/W	32400 lm
OLE Flexi ST200	200W	0.87A	8.0kg	320 x 562mm	<3500K	163 lm/W	32600 lm
					4000K	165 lm/W	33000 lm
					5000K	167 lm/W	33400 lm
					6000K	169 lm/W	33800 lm

*Flux data based on Ta = 35°C, CCT & Lumen + - 10%


Photometric Data

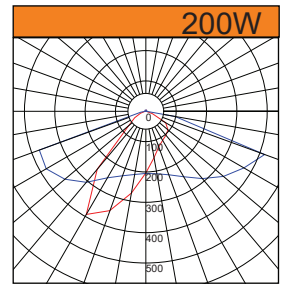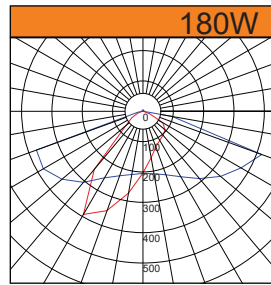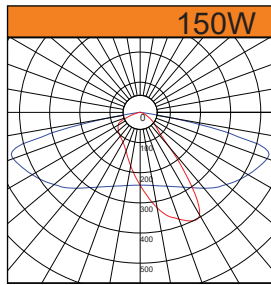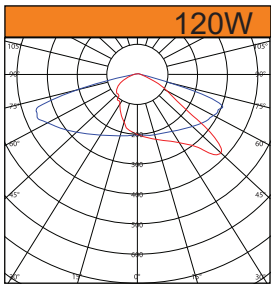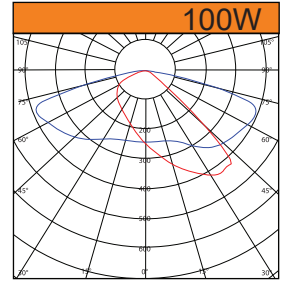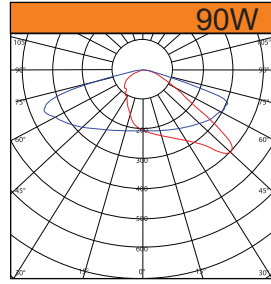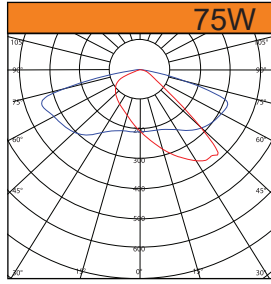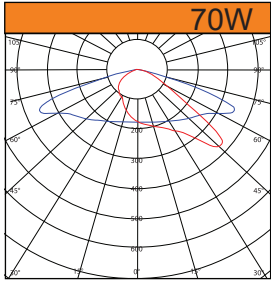

Optional for Adjustable Spigot	Fixed Spigot
--------------------------------	--------------

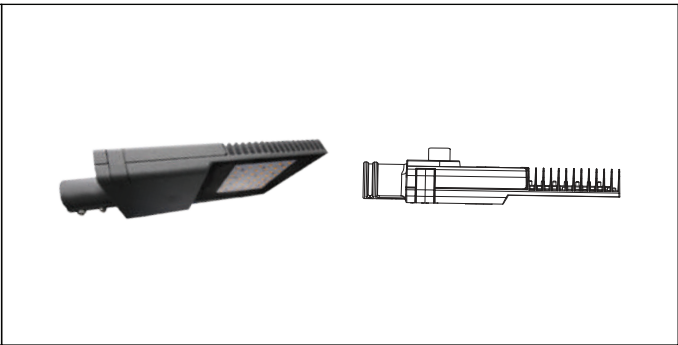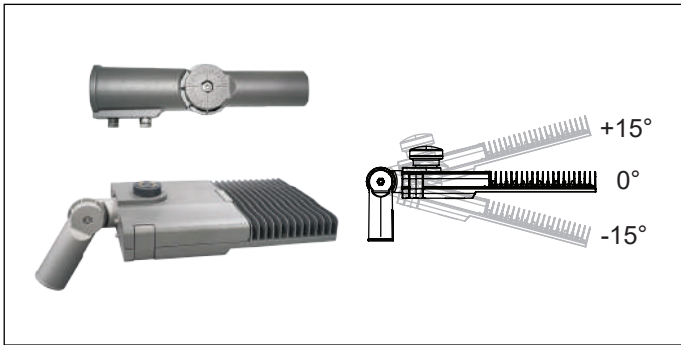


OLE Flexi ST

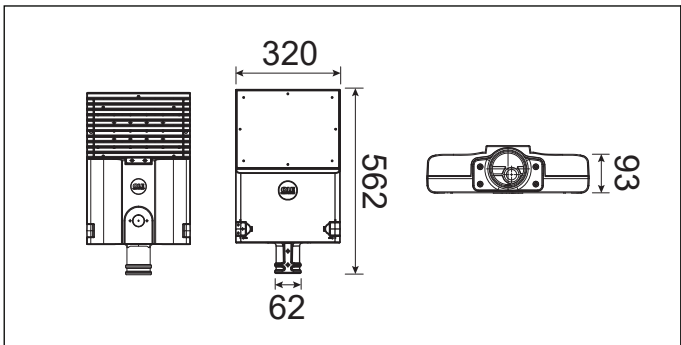

**Suitable for both 48mm & 60mm spigot adaptor*

Construction of OLE FLEXI ST

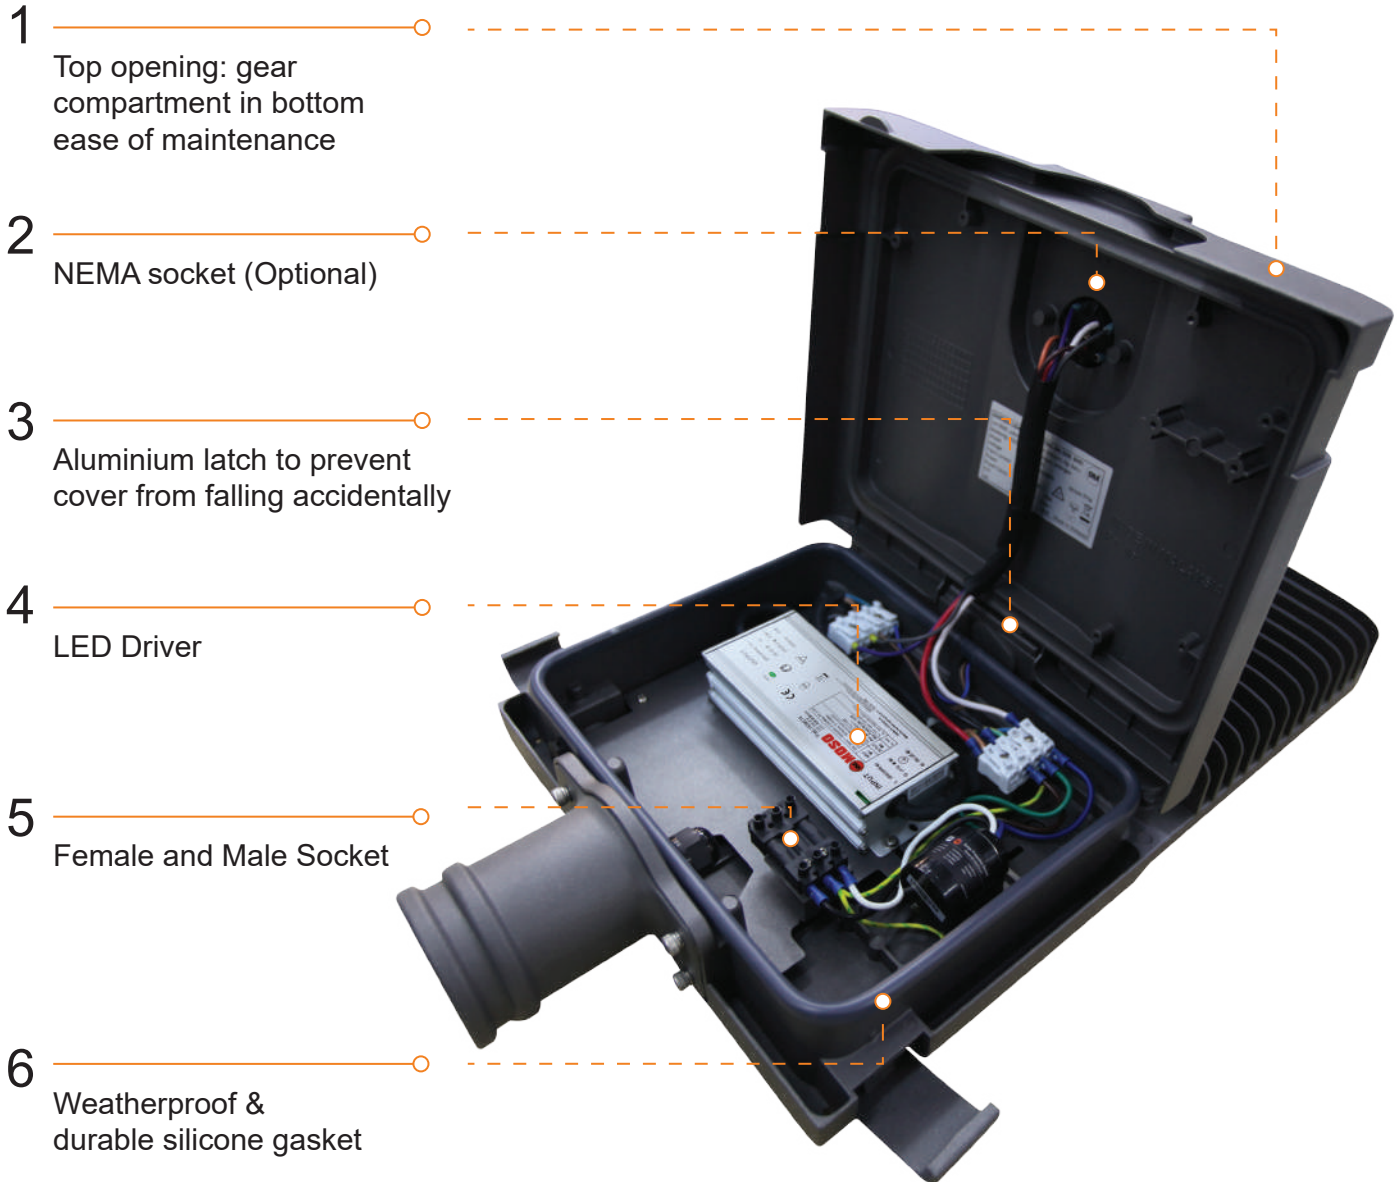


Cut - off connector
(Optional)



Clip lock to open and close
top opening cover



Safety switch cut off power
supply once cover opened
(optional)

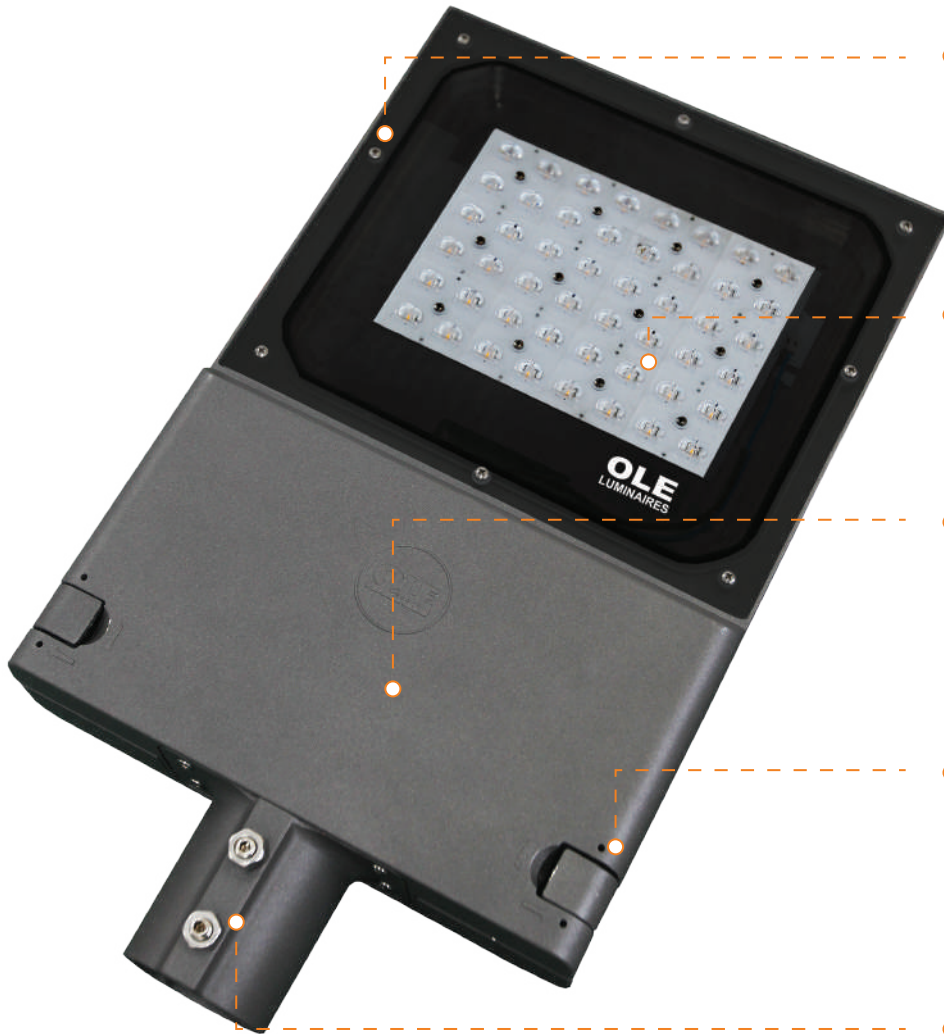

7 High transparency
5mm tempered glass cover

8 LED module

9 Casing material
Die-cast aluminum ADC12,
powder-coated finishing

10 Smart control for dimming
NEMA socket : Support NEMA,
ZIGBEE, LORA smart lighting
system (optional)

11 Interchangeable spigot



NEMA Socket
(Optional)



LED Module