

**DURA SPL RGB**

■ Grey



IP66

IK09

220V  
240V

MADE IN  
MALAYSIA

Floodlight

**Features**

- Lumen Maintenance : L90 @ 70,000 hours
- Working Temperature : -25°C ~ 50°C
- Storage Temperature : -25°C ~ 65°C
- Power Factor : >0.95 at Full Load
- THD : <20% at Full Load
- IP Protection : IP66 Optical Compartment

**Material**


- Casing : Pressure Casted Aluminium ADC12, Powder-Coated Finishing
- Cover : 5mm Tempered Glass
- Bracket : Mild Steel / Stainless Steel (Optional)
- Driver : DMX 512

**Advantages**

- To complement the native 5° lens, five standard secondary spread lenses can customize the fixture to produce 13°,30°,60°,90°,27°x112° beam angle. The option to add or combine a louver, full glare shield or half glare shield creates new aesthetic.
- Modular Design: Gear compartment separated from LED module to reduce heat.
- Rugged, slim profile mounting bracket that allows simple positioning & fixture rotation 270° full.

**Application**

Applicable for Bridge, Building, Facade Lighting, Landscape Lighting and etc.




270°  
Side locking bolts

## Specifications

Model No.	Power	Input current	Weight	Color	Efficacy	Lumen
OLE Dura SPL100	100W	0.43A	9.2kg	RGB	45 lm/W	4500 lm
OLE Dura SPL200	200W	0.96A	13.5kg	RGB	45 lm/W	9000 lm
OLE Dura SPL300	300W	1.30A	15.8kg	RGB	45 lm/W	13500 lm
OLE Dura SPL400	400W	1.74A	23.76kg	RGB	45 lm/W	18000 lm
OLE Dura SPL500	500W	2.17A	27.36kg	RGB	45 lm/W	22500 lm
OLE Dura SPL600	600W	2.50A	33kg	RGB	45 lm/W	27000 lm

\* Control Interface : Data Enabler Pro (DMX), Flux data based on CREE LED, 33° Beam angle, Ta = 25°C. Lumen +/-10%



## Photometric Data

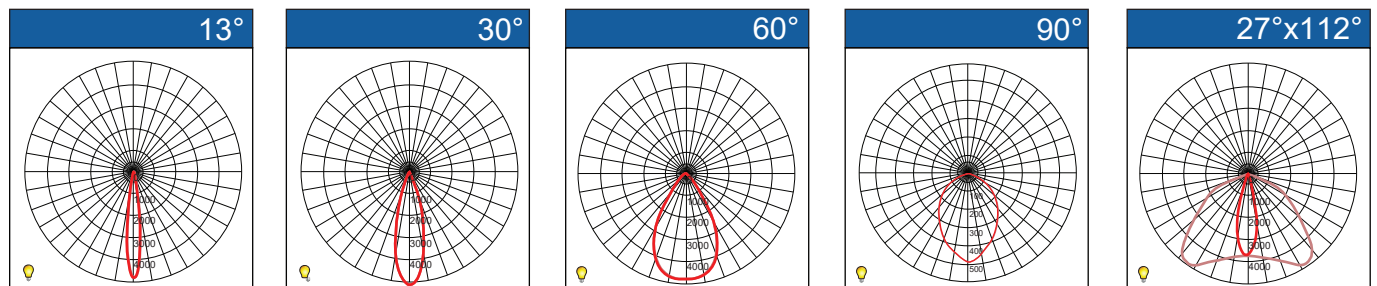

Floodlight



**Feature Diagram**

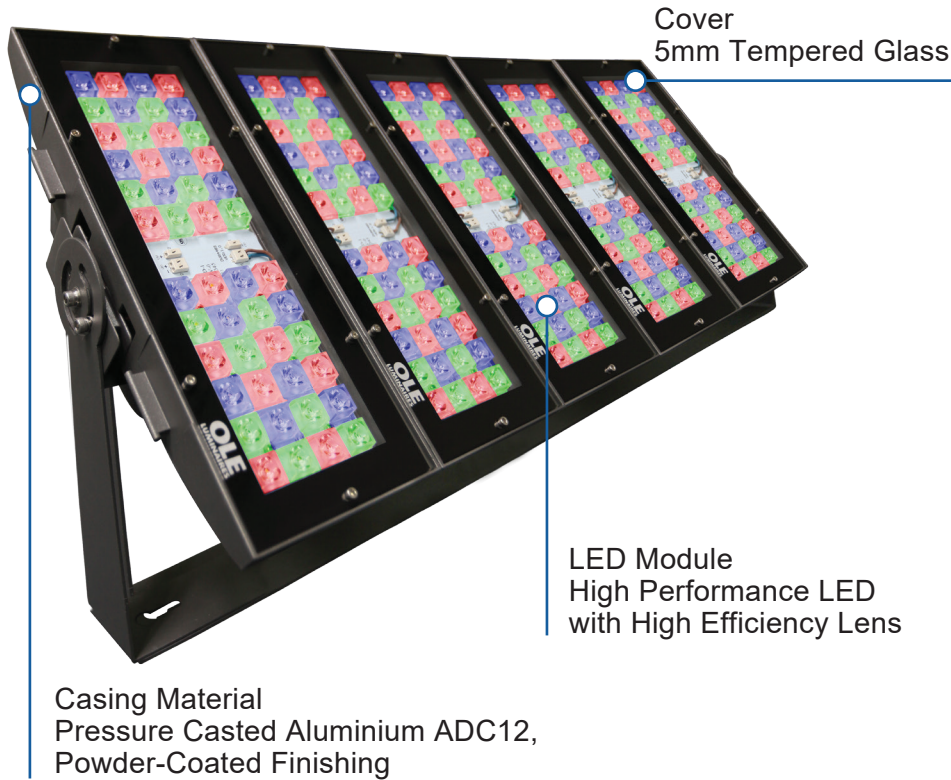

LED Module



Access to Gear and  
Electronic Compartment



Optional for Stainless  
Steel Bracket

**Dimensions**

OLE Dura SPL100	OLE Dura SPL200
<p>Carton Size: (L)245x(W)485x(H)245</p>	<p>Carton Size: (L)498x(W)448x(H)236</p>
OLE Dura SPL300	OLE Dura SPL400
<p>Carton Size: (L)542x(W)482x(H)245</p>	<p>Carton Size: (L)692x(W)482x(H)245</p>
OLE Dura SPL500	OLE Dura SPL600
<p>Carton Size: (L)842x(W)482x(H)245</p>	<p>Carton Size: (L)600x(W)950x(H)300</p>