



# LED SPOTLIGHT. OLE BL D60TJ/D80TJ



OLE BL 0108D60TJ

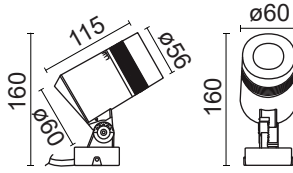


OLE BL 0115D80TJ

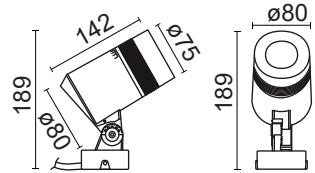


## OLE BL D60TJ/D80TJ

Code	BL 0108D60TJ	BL 0115D80TJ
Power	LED 1*8W	LED 1*15W
LED Brand	CREE	
Color	3000K~6000K	
Beam Angle	from 15° adjust to 60°	
Input Voltage	AC240V/DC12V/DC24V	

Protection : IP66  
 Impact Protection : IK08  
 Color Rendering Index (CRI) : >80/90  
 Material : Die-Cast Aluminium ADC12  
 Connector : IP68 Connector

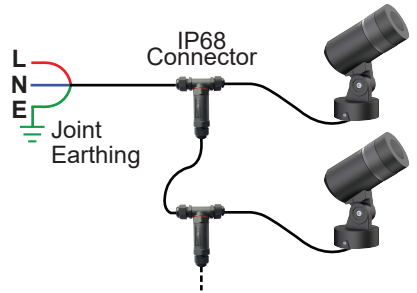




The zoom oval light distribution is 20°x60°. The alignment of the oval can also be adjusted


Zoom Spot  
15°~60°

---



By rotating the zoom lens attachment, the light distribution can be continuously modified from spot with a beam angle of 15° to wide flood with up to 60°

Zoom Oval  
20°~60°

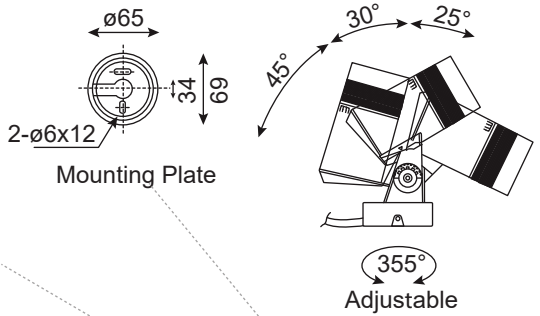

## Optical Accessories



Filter



Diffuser glass



Refractor for elliptical distribution



Honeycomb louver



Cylindrical hood



Cylindrical hood angle 45°



We reserve the right to make technical and design changes.

[www.oversealighting.com](http://www.oversealighting.com)

OVERSEA LIGHTING & ELECTRIC (M) SDN BHD

Lot 6595, Jalan KPB12B, Kawasan Industri Kampung Baru Balakong, 43300 Seri Kembangan, Selangor Darul Ehsan, Malaysia.

Tel : (603) 8964 1878, 8964 1888, 8964 1899

Fax : (603) 8964 1868

Email : [info@oversealighting.com](mailto:info@oversealighting.com)