

**DURA SPL**

■ Grey



**IP66**   **IK09**   **220V**  
**240V**   **CRI**  
**>70**   **BUATAN MALAYSIA**  
**MADE IN MALAYSIA**

Sport Lighting

**Features**

Lumen Maintenance : L90 @ 70,000 hours  
 Working Temperature : -25°C ~ 50°C  
 Storage Temperature : -25°C ~ 80°C  
 Power Factor : >0.95 at Full Load  
 THD : <20% at Full Load  
 IP Protection : IP66 Optical Compartment

**Material**

Casing : Pressure Casted Aluminium ADC12,  
 Powder-Coated Finishing  
 Cover : 5mm Tempered Glass  
 Bracket : Mild Steel / Stainless Steel (Optional)  
 Dimming : (Optional) 0-10V / DALI / Timer

**Advantages**


- Can customize the fixture to produce 13°, 30°, 60°, 90°, 27°x112° beam angle. The option to add or combine a louver, full glare shield or half glare shield creates new aesthetic.
- Modular Design: Gear compartment separated from LED module to reduce heat.
- Rugged, slim profile mounting bracket that allows simple positioning & fixture rotation 270° full.

**Application**

Applicable for Tennis Court Lighting, Complex Sport Lighting, Golf Club Lighting, Football Stadium Lighting, Highmast Lighting, Amenity Lighting and etc.

**Certification**

Compliance to MS IEC 60598-1 : 2012, MS IEC 60598-2-5 : 2006




270°  
Side locking bolts

## Specifications


Model No.	Power	Input current	Weight	CCT	Efficacy	Lumen
OLE Dura SPL120	120W	0.52A	6.5kg	<3500K	124 lm/W	14880 lm
				4000K	130 lm/W	15600 lm
				5000K	132 lm/W	15840 lm
				6000K	132 lm/W	15840 lm
OLE Dura SPL180	180W	0.78A	12kg	<3500K	134 lm/W	24120 lm
				4000K	140 lm/W	25200 lm
				5000K	142 lm/W	25560 lm
				6000K	142 lm/W	25560 lm
OLE Dura SPL240	240W	1.04A	12kg	<3500K	123 lm/W	29520 lm
				4000K	128 lm/W	30720 lm
				5000K	130 lm/W	31200 lm
				6000K	132 lm/W	31680 lm
OLE Dura SPL300	300W	1.30A	17kg	<3500K	132 lm/W	39600 lm
				4000K	139 lm/W	41700 lm
				5000K	141 lm/W	42300 lm
				6000K	141 lm/W	42300 lm
OLE Dura SPL360	360W	1.56A	18kg	<3500K	122 lm/W	43920 lm
				4000K	127 lm/W	45720 lm
				5000K	129 lm/W	46440 lm
				6000K	132 lm/W	47520 lm
OLE Dura SPL400	400W	1.73A	22.5kg	<3500K	131 lm/W	52400 lm
				4000K	137 lm/W	54800 lm
				5000K	139 lm/W	55600 lm
				6000K	139 lm/W	55600 lm
OLE Dura SPL480	480W	2.08A	22.5kg	<3500K	122 lm/W	58560 lm
				4000K	126 lm/W	60480 lm
				5000K	128 lm/W	61440 lm
				6000K	132 lm/W	63360 lm
OLE Dura SPL600	600W	2.60A	39kg	<3500K	128 lm/W	76800 lm
				4000K	134 lm/W	80400 lm
				5000K	136 lm/W	81600 lm
				6000K	138 lm/W	82800 lm
OLE Dura SPL800	800W	3.47A	50.45kg	<3500K	125 lm/W	100000 lm
				4000K	131 lm/W	104800 lm
				5000K	133 lm/W	106400 lm
				6000K	138 lm/W	110400 lm
OLE Dura SPL960	960W	4.17A	50.45kg	<3500K	115 lm/W	110400 lm
				4000K	121 lm/W	116160 lm
				5000K	123 lm/W	118080 lm
				6000K	123 lm/W	118080 lm
OLE Dura SPL1000	1000W	4.35A	60kg	<3500K	133 lm/W	133000 lm
				4000K	137 lm/W	137000 lm
				5000K	137 lm/W	137000 lm
				6000K	136 lm/W	136000 lm
OLE Dura SPL1200	1200W	5.21A	60kg	<3500K	129 lm/W	154800 lm
				4000K	133 lm/W	159600 lm
				5000K	133 lm/W	159600 lm
				6000K	132 lm/W	158400 lm

\* Flux data based on Ta = 25°C, CCT & Lumen +/-10%

## Photometric Data


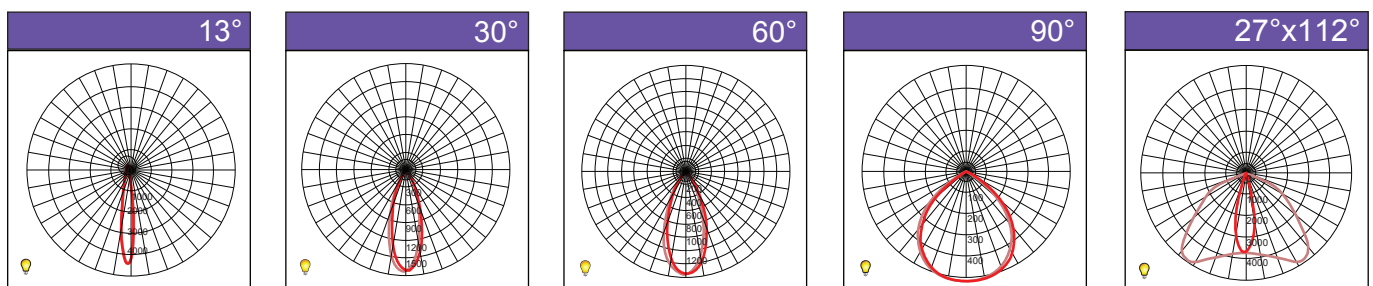


## Feature Diagram



## Accessories


Extra Glare Control  
Protection



## Dimensions


### OLE Dura SPL120

Carton Size: (L)245x(W)485x(H)245

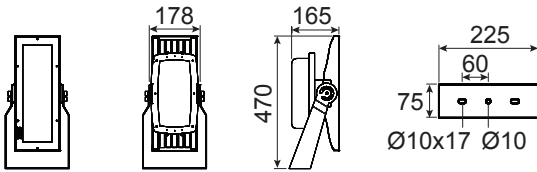


### OLE Dura SPL180 | OLE Dura SPL240

Carton Size: (L)498x(W)448x(H)236

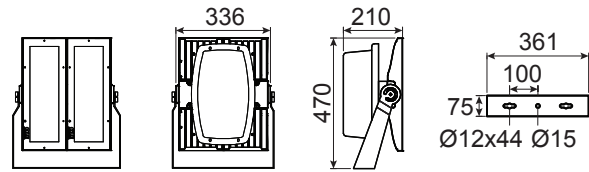


### OLE Dura SPL300 | OLE Dura SPL360

Carton Size: (L)542x(W)482x(H)245

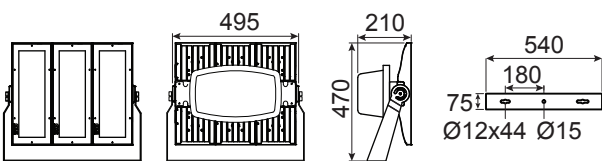


### OLE Dura SPL400 | OLE Dura SPL480

Carton Size: (L)692x(W)482x(H)245

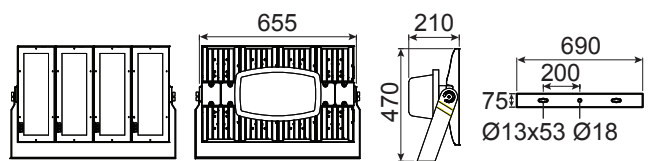


### OLE Dura SPL600

Carton Size: (L)600x(W)950x(H)300

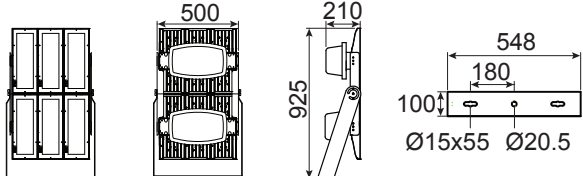

### OLE Dura SPL800 | OLE Dura SPL960

Carton Size: (L)1000x(W)800x(H)300

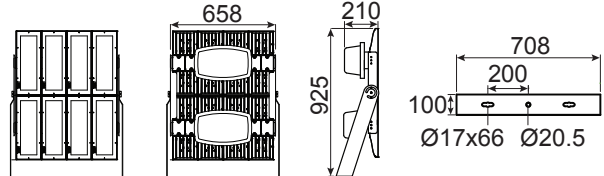

### OLE Dura SPL1000 | OLE Dura SPL1200

Carton Size: (L)1000x(W)1150x(H)300

