

DURA WM

■ Grey



IP66

IK09

220V
240V

CRI
>70

MADE IN
MALAYSIA

Floodlight

Features

Lumen Maintenance : L90 @ 70,000 hours
 Working Temperature : -25°C ~ 50°C
 Storage Temperature : -25°C ~ 80°C
 Power Factor : >0.95 at Full Load
 THD : <20% at Full Load

Material


Casing : Pressure casted aluminum ADC12, powder-coated finishing
 Cover : 5mm tempered glass
 Bracket : Mild Steel / Stainless Steel (Optional)
 Dimming : (Optional) 0-10V / DALI / Timer

Advantages

- Modular Design: Gear compartment separated from LED module to reduce heat. Higher power can be upgraded in the future without having to replace whole fixture.
- Support NEMA socket for smart control.

Application

Applicable for Sports Lighting, Ports, Stadium, Highmast Lighting, Amenity Lighting and Tunnel Lighting.




270°
Side locking bolts

Specifications



| Model No. | Power | Input current | Weight | CCT | Efficacy | Lumen |
|----------------|-------|---------------|--------|--------|----------|----------|
| OLE Dura WM120 | 120W | 0.52A | 11.2kg | <3500K | 124 lm/W | 14880 lm |
| | | | | 4000K | 130 lm/W | 15600 lm |
| | | | | 5000K | 132 lm/W | 15840 lm |
| | | | | 6000K | 132 lm/W | 15840 lm |
| OLE Dura WM180 | 180W | 0.78A | 14.1kg | <3500K | 134 lm/W | 24120 lm |
| | | | | 4000K | 140 lm/W | 25200 lm |
| | | | | 5000K | 142 lm/W | 25560 lm |
| | | | | 6000K | 142 lm/W | 25560 lm |
| OLE Dura WM240 | 240W | 1.04A | 14.1kg | <3500K | 123 lm/W | 29520 lm |
| | | | | 4000K | 128 lm/W | 30720 lm |
| | | | | 5000K | 130 lm/W | 31200 lm |
| | | | | 6000K | 132 lm/W | 31680 lm |
| OLE Dura WM300 | 300W | 1.30A | 17kg | <3500K | 132 lm/W | 39600 lm |
| | | | | 4000K | 139 lm/W | 41700 lm |
| | | | | 5000K | 141 lm/W | 42300 lm |
| | | | | 6000K | 141 lm/W | 42300 lm |

* Flux data based on Ta = 25°C, CCT & Lumen +/-10%

Photometric Data

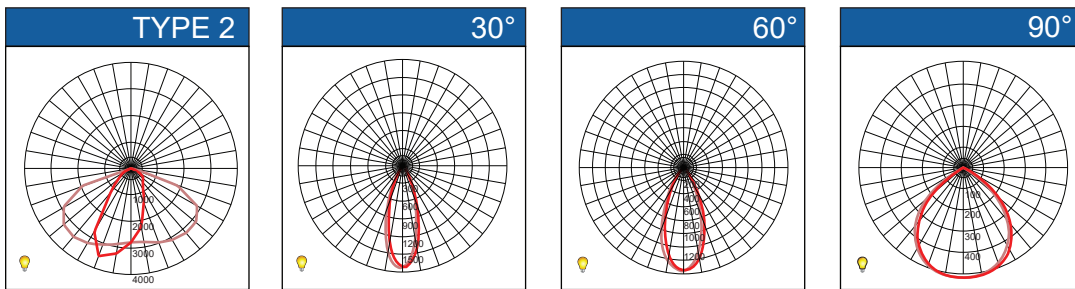


Feature Diagram

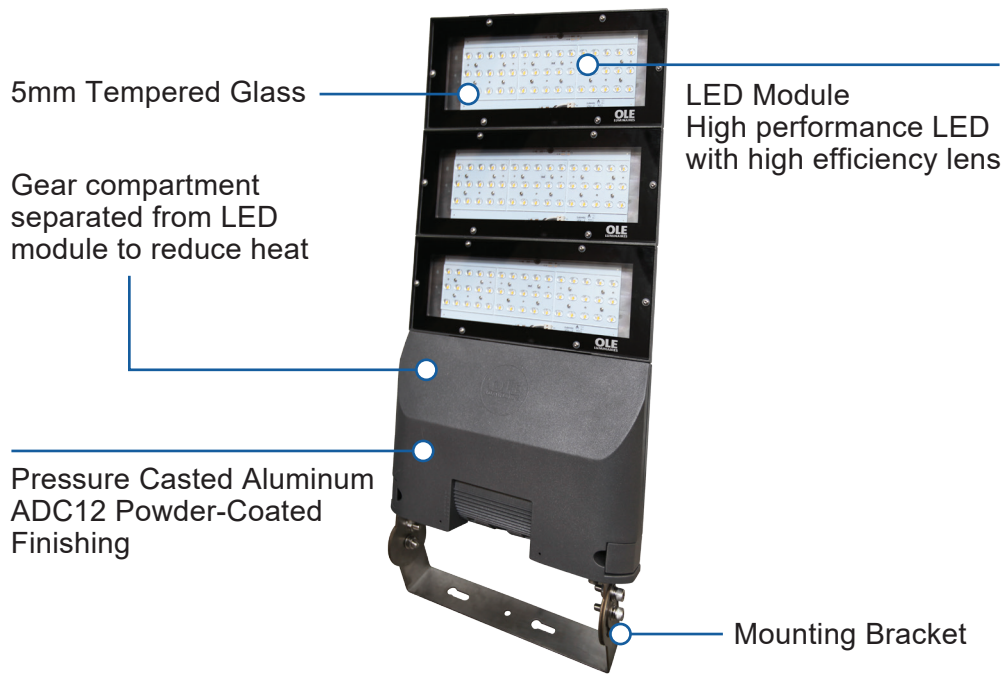

NEMA Socket (Optional)



Clip lock gear tray for toolless maintenance

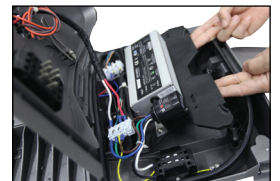


Safety switch cut off power supply once cover opened (Optional)

Dimension


OLE Dura WM120

Carton Size: (L)590x(W)428x(H)151

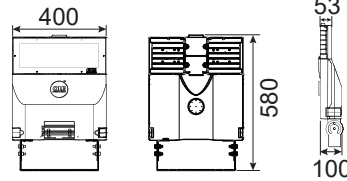


OLE Dura WM180

Carton Size: (L)753x(W)428x(H)151

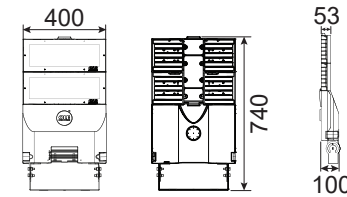

OLE Dura WM240

Carton Size: (L)753x(W)428x(H)151

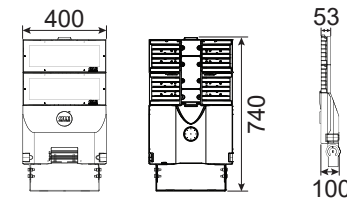

OLE Dura WM300

Carton Size: (L)930x(W)428x(H)151

