

OLE can provide 7-10 years warranty

OLE FLEXI ST



FEATURES

- Input voltage: 220V~240V / Universal input
- Lumen Maintenance: L90 @ 100,000 hours
- Working Temperature: -25°C ~ 50°C
- Storage Temperature: -25°C ~ 80°C
- Power Factor: >0.95 at Full Load

MATERIALS

- Casing material: Die-Cast Aluminum
ADC12, Powder-Coated Finishing
- Cover: 5mm Tempered Glass
- Driver: Dimmable, Programmable
& DALI Compatible 1~10V (Optional)
- NEMA Socket: Support NEMA, ZIGBEE, PLC,
LORA Smart Lighting System (Optional)




Specification

Model No.	Power	Input current	Weight	Lantern Size	CCT	Efficacy	Lumen
OLE Flexi ST70	70W	0.30A	7.0kg	320 x 562mm	<3500K	142 lm/W	9940 lm
					4000K	146 lm/W	10220 lm
					5000K	146 lm/W	10220 lm
					6000K	144 lm/W	10080 lm
OLE Flexi ST75	75W	0.32A	7.8kg	320 x 562mm	<3500K	134 lm/W	10050 lm
					4000K	138 lm/W	10350 lm
					5000K	138 lm/W	10350 lm
					6000K	136 lm/W	10200 lm
OLE Flexi ST90	90W	0.39A	7.8kg	320 x 562mm	<3500K	151 lm/W	13590 lm
					4000K	155 lm/W	13950 lm
					5000K	155 lm/W	13950 lm
					6000K	153 lm/W	13770 lm
OLE Flexi ST100	100W	0.43A	7.8kg	320 x 562mm	<3500K	142 lm/W	14200 lm
					4000K	146 lm/W	14600 lm
					5000K	146 lm/W	14600 lm
					6000K	144 lm/W	14400 lm
OLE Flexi ST120	120W	0.52A	8.0kg	320 x 562mm	<3500K	145 lm/W	17400 lm
					4000K	150 lm/W	18000 lm
					5000K	150 lm/W	18000 lm
					6000K	148 lm/W	17760 lm
OLE Flexi ST150	150W	0.65A	8.0kg	320 x 562mm	<3500K	140 lm/W	21000 lm
					4000K	143 lm/W	21450 lm
					5000K	142 lm/W	21300 lm
					6000K	141 lm/W	21150 lm
OLE Flexi ST180	180W	0.78A	8.0kg	320 x 562mm	<3500K	138 lm/W	24840 lm
					4000K	142 lm/W	25560 lm
					5000K	141 lm/W	25380 lm
					6000K	139 lm/W	25020 lm
OLE Flexi ST200	200W	0.87A	8.0kg	320 x 562mm	<3500K	130 lm/W	26000 lm
					4000K	134 lm/W	26800 lm
					5000K	133 lm/W	26600 lm
					6000K	131 lm/W	26200 lm

*Flux data based on Ta = 35°C, CCT & Lumen + - 10%

Photometric Data

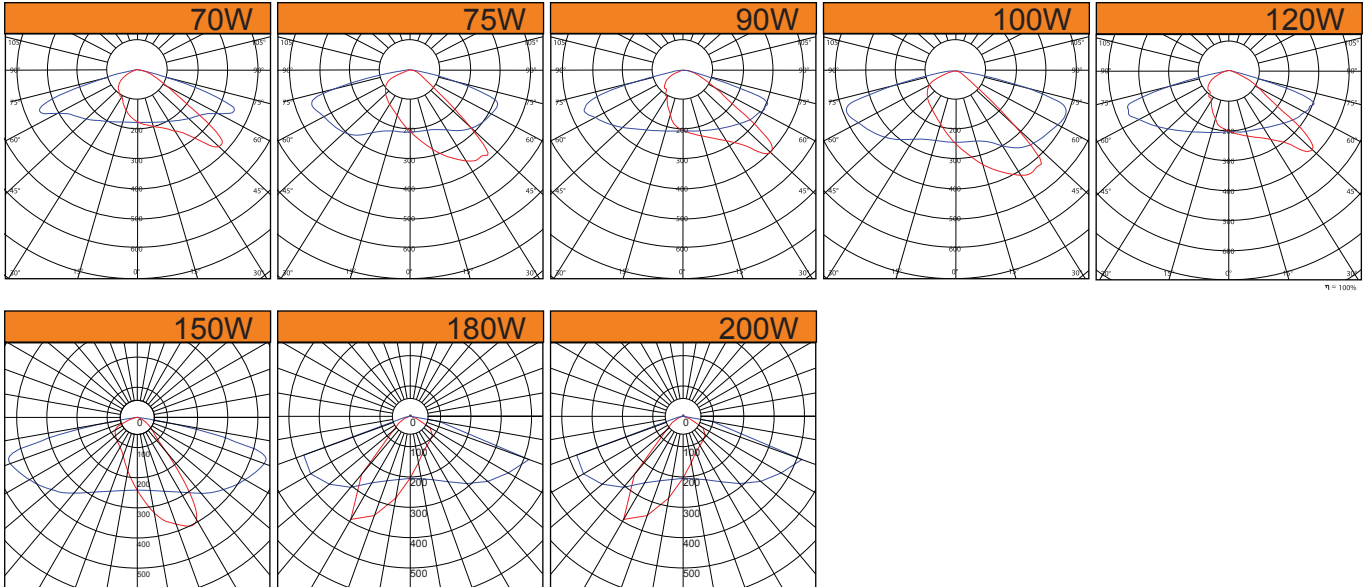


Optional for Adjustable Spigot	Fixed Spigot

OLE Flexi ST

	<p style="text-align: right;">Carton Size: 590 x 360 x 135</p>
--	--

*Suitable for both 48mm & 60mm spigot adaptor

Construction of OLE FLEXI ST

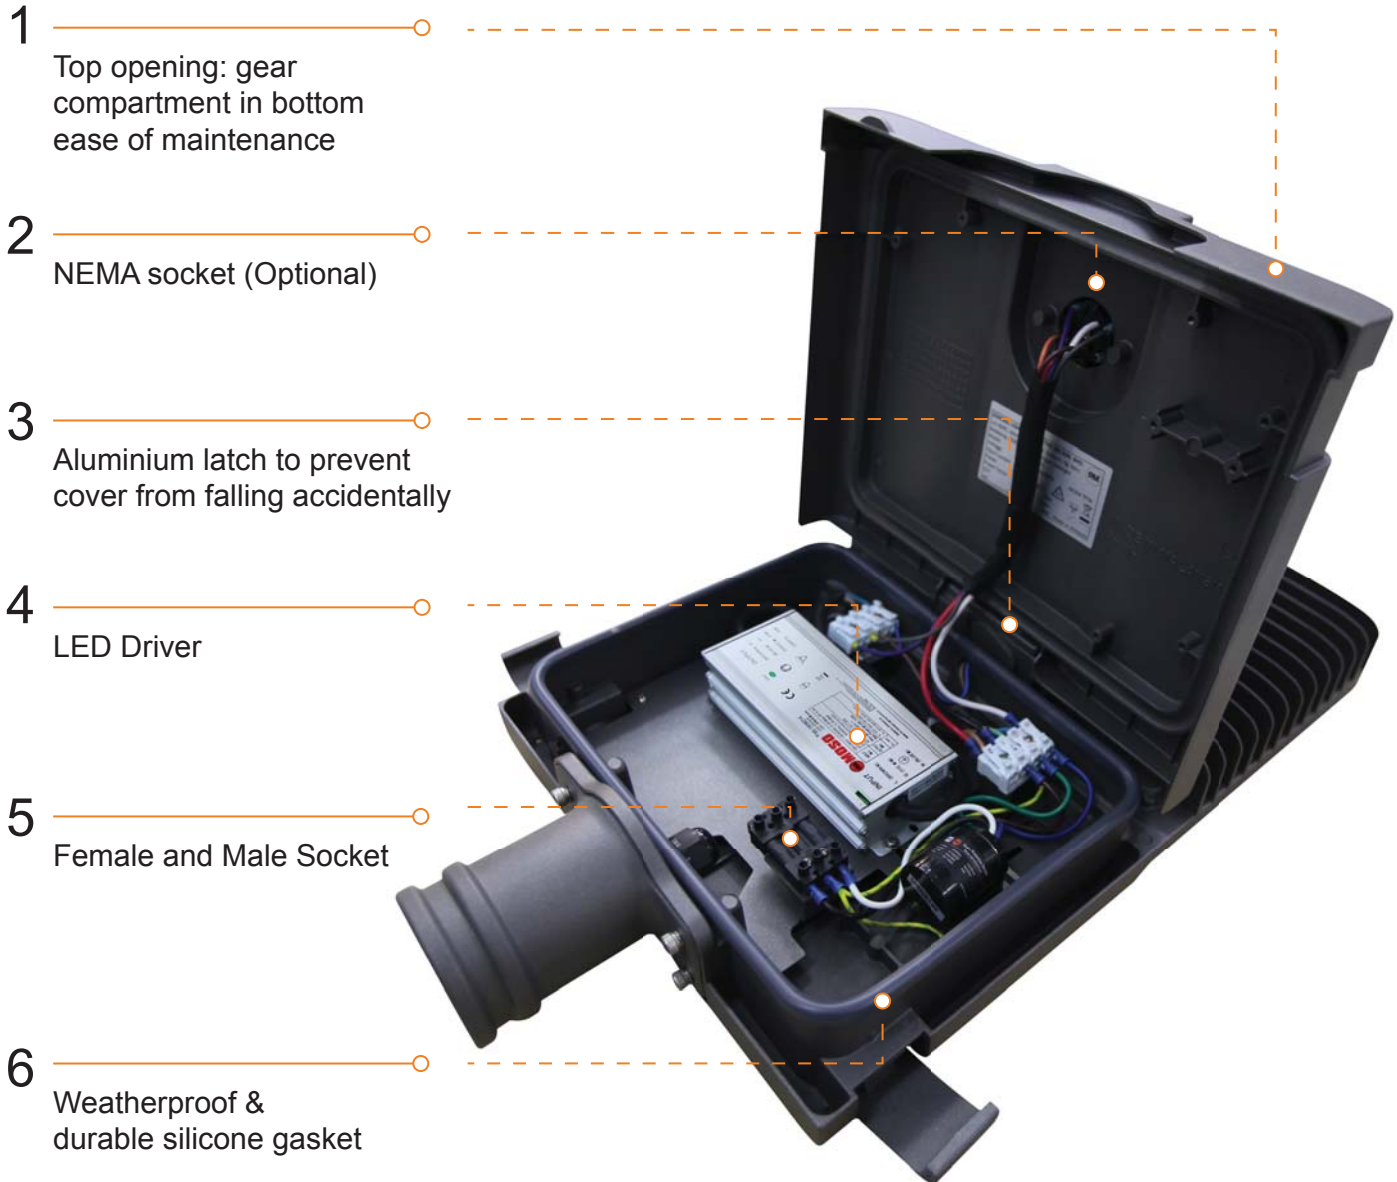


Cut - off connector
(Optional)



Clip lock to open and close
top opening cover



Safety switch cut off power
supply once cover opened
(optional)

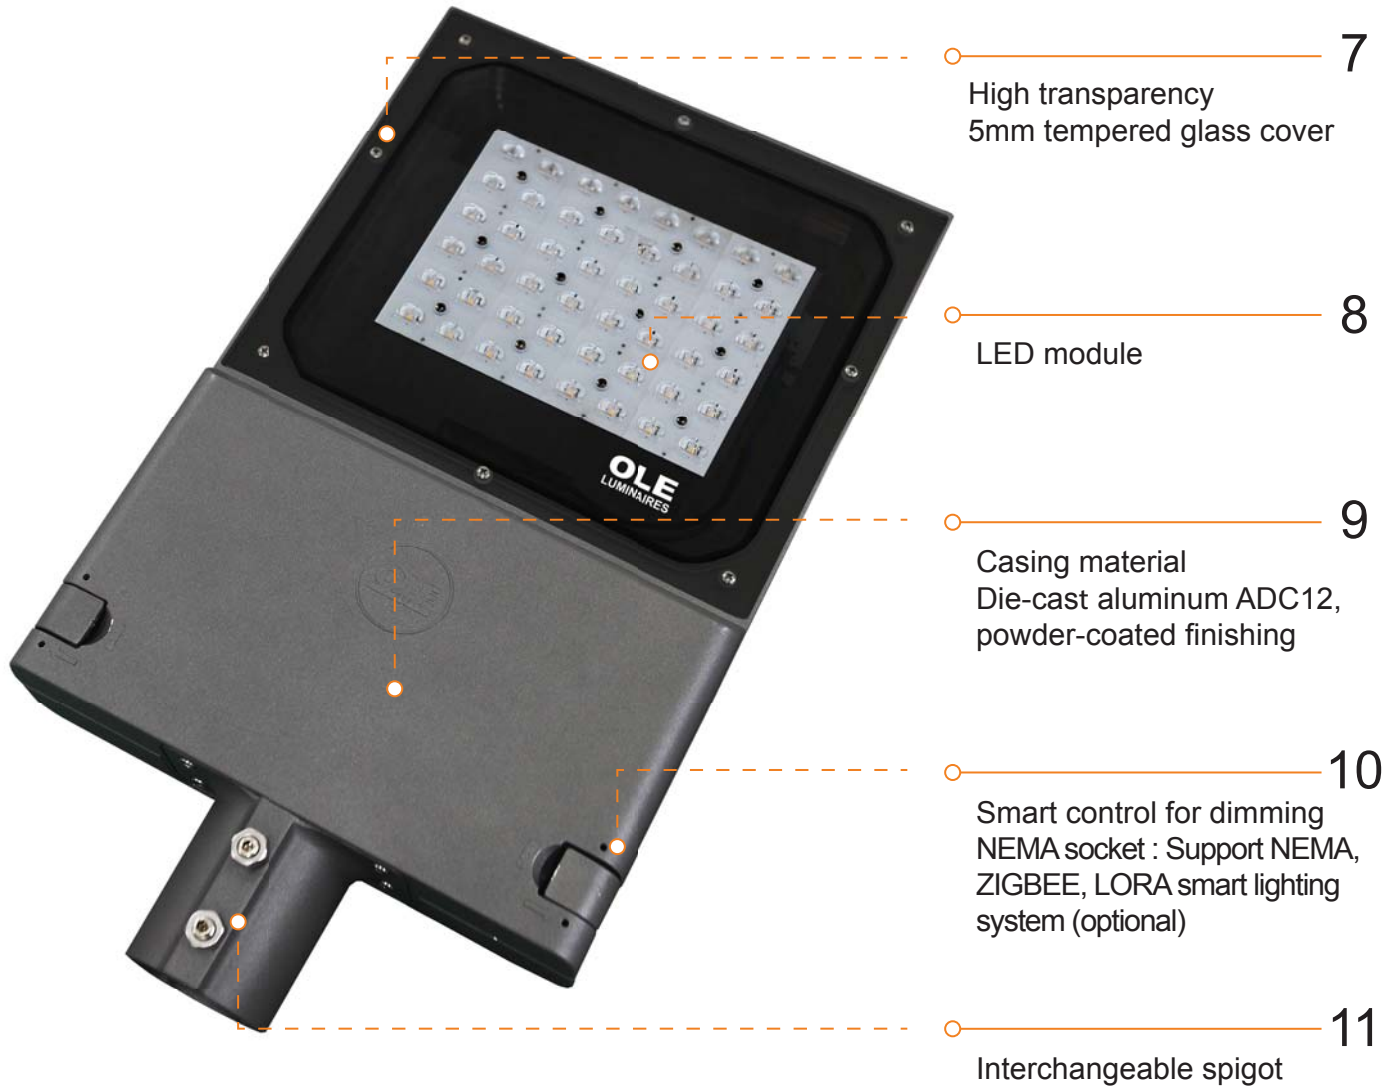

NEMA Socket
(Optional)



LED Module