

ATLAS

■ Grey



IP65	220V 240V	CRI >70	 BUATAN MALAYSIA MADE IN MALAYSIA
------	--------------	------------	--



Landscape Lighting

Features

Lumen Maintenance : L90 @ 60,000 hours
 Working Temperature : -40°C ~ 50°C
 Storage Temperature : -20°C ~ 80°C
 Power Factor : >0.95 at Full Load
 THD : <20% at Full Load

Material

Casing : Extrusion aluminum AA 6063-T5 with outdoor epoxy powder coated
 Lens : Polycarbonate
 Flange Plate: Aluminum
 Dimming : (Optional) 0-10V / DALI / Timer

Advantages

It has a versatile light distribution. Can be use by both residential and commercial buildings for security, safety and beauty purposes.

Application

Applicable for Pedestrian Walkway, Car Park, Garden Lighting, Area Lighting and others.

Certification

Compliances LED Module: IEC62031.


Specifications

Model No.	Power	Lamp	Input current	Weight	Color	Efficacy	Lumen
OLE ATLAS S-40W-3M	40W	1 Module	0.17A	32.1kg	3500K-6000K	134 lm/W	5360 lm
OLE ATLAS S-40W-4M	40W	1 Module	0.17A	40.06kg	3500K-6000K	134 lm/W	5360 lm
OLE ATLAS S-80W-5M	80W	2 Modules	0.34A	48.58kg	3500K-6000K	140 lm/W	11200 lm
OLE ATLAS S-80W-6M	80W	2 Modules	0.34A	56.55kg	3500K-6000K	140 lm/W	11200 lm
OLE ATLAS D-40W-3M	40Wx2	1 Modulex2	0.34A	40.3kg	3500K-6000K	134 lm/W	10720 lm
OLE ATLAS D-40W-4M	40Wx2	1 Modulex2	0.34A	48.27kg	3500K-6000K	134 lm/W	10720 lm
OLE ATLAS D-80W-5M	80Wx2	2 Modulex2	0.69A	56.23kg	3500K-6000K	140 lm/W	22400 lm
OLE ATLAS D-80W-6M	80Wx2	2 Modulex2	0.69A	64.2kg	3500K-6000K	140 lm/W	22400 lm

Photometric Data



Feature Diagram

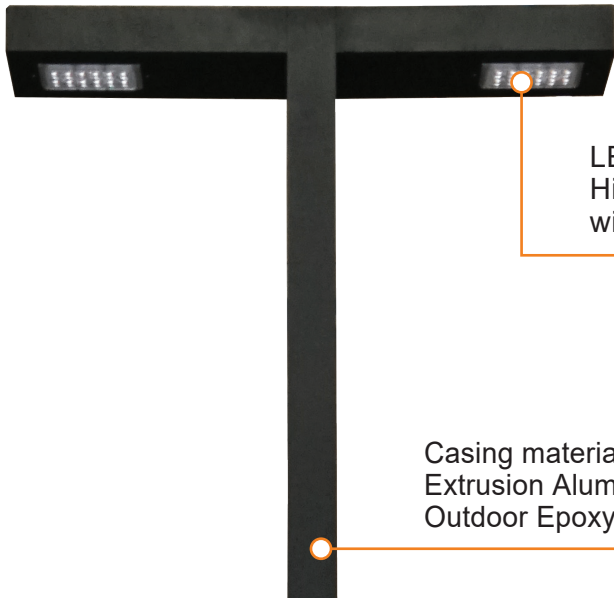

LED Module
High performance LED
with high efficiency lens


Casing material
Extrusion Aluminum AA 6063-T5 with
Outdoor Epoxy Powder Coated



LED Module



Optional for Tilting Angle 10°



Aluminum Flange Plate

Dimension

Landscape Lighting

OLE ATLAS S-40W	OLE ATLAS S-80W
<p>Wrapping Size: (3M)3015x617x165 / (4M)4015x617x165</p> <p>3000-6000 150 90 602 90 104 250 600 10° 220 300 Flange Plate Tilting Angle (Optional) *setting in factory</p>	<p>Wrapping Size: (5M)5015x917x165 / (6M)6015x917x165</p> <p>3000-6000 150 90 902 90 104 250 600 10° 220 300 Flange Plate Tilting Angle (Optional) *setting in factory</p>
OLE ATLAS D-40W	OLE ATLAS D-80W
<p>Wrapping Size: (3M)3015x1128x165 / (4M)4015x1128x165</p> <p>3000-6000 150 90 1113 90 104 250 600 10° 220 300 Flange Plate Tilting Angle (Optional) *setting in factory</p>	<p>Wrapping Size: (5M)5015x1728x165 / (6M)6015x1728x165</p> <p>3000-6000 150 90 1713 90 104 250 600 10° 220 300 Flange Plate Tilting Angle (Optional) *setting in factory</p>