



IP66

IK08

120V
480V

CRI
>70



Features

Lumen Maintenance : L70 @ 100,000 hours
Ambient Temperature : -40°C ~ 50°C
Power Factor : >0.95 at Full Load
THD : <20% at Full Load

Material


Lens Material : PC Lens + Glass Cover
Dimming : 0-10V Dimming / DMX512

Advantages

- High brightness, wide irradiation area for better lighting effect.
- Rugged, slim profile mounting bracket that allows simple positioning & fixture rotation 180°.
- Efficient heatsink for optimal heat dissipation.

Application

Applicable for Public Square, Parking Lot, Sporting Facility, Airport, Railway, Port, Shipping Yard and Container Loading Area.



180°


Side locking bolts

Specifications


Model No.	Power	Input current	Weight	CCT	Efficacy	Lumen
OLE FL04-100	100W	0.43A	5.4kg	<3000K	160 lm/W	16000 lm
				4000K	160 lm/W	16000 lm
				5700K	160 lm/W	16000 lm
				6500K	160 lm/W	16000 lm
OLE FL04-200	200W	0.87A	7.0kg	<3000K	160 lm/W	32000 lm
				4000K	160 lm/W	32000 lm
				5700K	160 lm/W	32000 lm
				6500K	160 lm/W	32000 lm
OLE FL04-320	320W	1.39A	9.4kg	<3000K	160 lm/W	51200 lm
				4000K	160 lm/W	51200 lm
				5700K	160 lm/W	51200 lm
				6500K	160 lm/W	51200 lm
OLE FL04-480	480W	2.09A	13.0kg	<3000K	160 lm/W	76800 lm
				4000K	160 lm/W	76800 lm
				5700K	160 lm/W	76800 lm
				6500K	160 lm/W	76800 lm
OLE FL04-600	600W	2.60A	13.9kg	<3000K	160 lm/W	96000 lm
				4000K	160 lm/W	96000 lm
				5700K	160 lm/W	96000 lm
				6500K	160 lm/W	96000 lm
OLE FL04-1000	1000W	4.35A	18.0kg	<3000K	160 lm/W	160000 lm
				4000K	160 lm/W	160000 lm
				5700K	160 lm/W	160000 lm
				6500K	160 lm/W	160000 lm

* Flux data based on Ta = 25°C, CCT & Lumen +/-10%

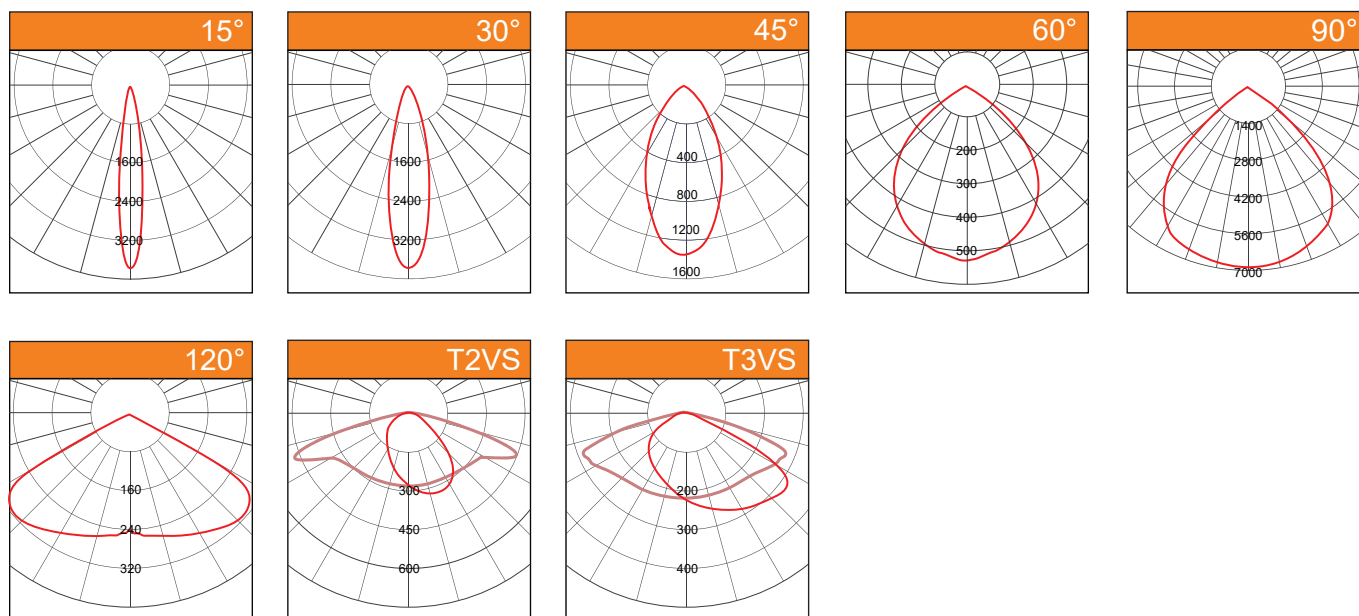Photometric Data



Feature Diagram

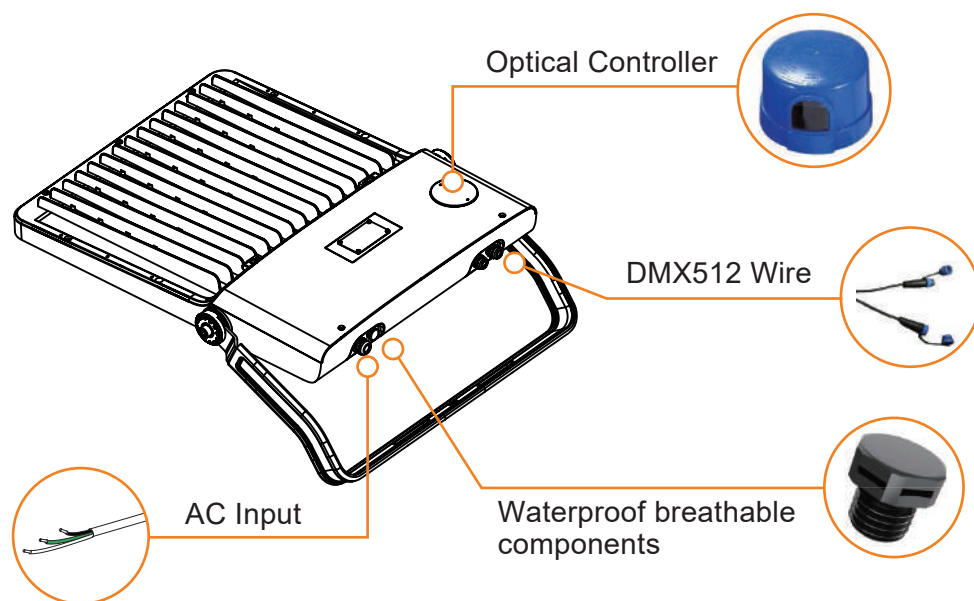

IP66 Waterproof







Efficient Heat Dissipation



Flexible & Adjustable Bracket

Dimensions

OLE FL04-100	OLE FL04-200
Carton Size: (L)490x(W)355x(H)120 	Carton Size: (L)545x(W)405x(H)120 
OLE FL04-320	OLE FL04-480 OLE FL04-600
Carton Size: (L)605x(W)460x(H)130 	Carton Size: (L)740x(W)535x(H)135 
OLE FL04-1000	
Carton Size: (L)840x(W)630x(H)135 