
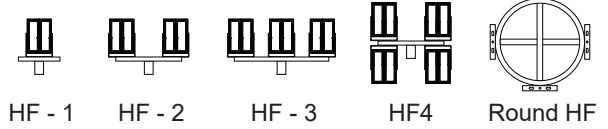


Floodlight Pole / Climbing-Rung Pole / Flange Mounted Type

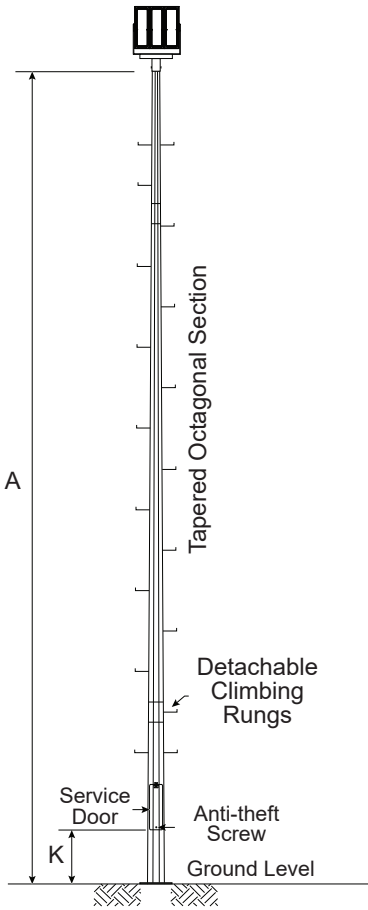


J-Bolt	I-Bolt
Flange Plate x (F) Thk.	Earthing Lug
Service Door (Side view)	Service Door (Detail)

Climbing rungs column equipped with detachable or welded 'Z' shaped climbing rungs (brackets), enabling maintenance work without the need of lifting equipment.

Height	Service Door		Flange Plate		I/J-Bolt	Grd. Lvl. to Service Door	
	A	B	C	D x E x (F) THK.	G x H	J	K
Meter	MM	MM	MM	MM	MM	MM	MM
3/4	350	90	250x195x9	20x45	ø16x280 (L)	305	
5	450	90	300x220x9	20x45	ø16x280 (L)	305	
6	450	90	300x220x9	25x50	ø20x450 (L)	305	
7	450	90	300x220x9	25x50	ø20x450 (L)	305	
8	450	90	300x220x12	25x50	ø20x450 (L)	305	
9	450	100	300x220x12	25x50	ø20x450 (L)	500 (1800 Optional)	
10	450	100	350x260x16	30x55	ø24x570 (L)	500 (1800/2000 Optional)	
12	450	120	400x300x16	30x55	ø24x570 (L)	500 (1800/2000 Optional)	

Floodlight Pole / Climbing-Rung Pole / Planted Type

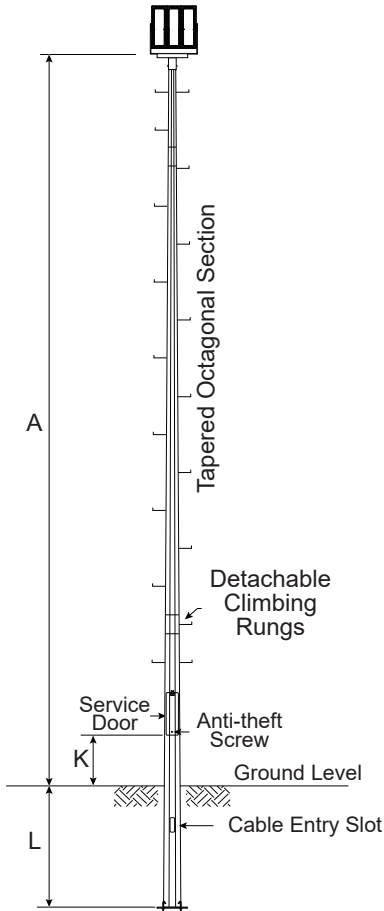

Earthing Lug	Hook Bolt
Service Door (Detail)	Service Door (Side view)

Climbing rungs column equipped with detachable or welded 'Z' shaped climbing rungs (brackets), enabling maintenance work without the need of lifting equipment.

Height	Service Door		Grd. Lvl. to Service Door	Planting Depth	
	A	B	C	K	L
Meter	MM	MM	MM	MM	MM
3/4	350	90	305	600/800	
5	450	90	305	1000	
6	450	90	305	1100	
7	450	90	305	1200	
8	450	90	305	1300	
9	450	100	500 (1800 Optional)	1400	
10	450	100	500 (1800/2000 Optional)	1500	
12	450	120	500 (1800/2000 Optional)	1700	