

Round Aluminium Pole

Application




Pedestrian walkway, car park, garden light, area light and others.

Housing Material

Extrusion aluminum AA 6063-T5.

Finishing

Durable outdoor powder coated.

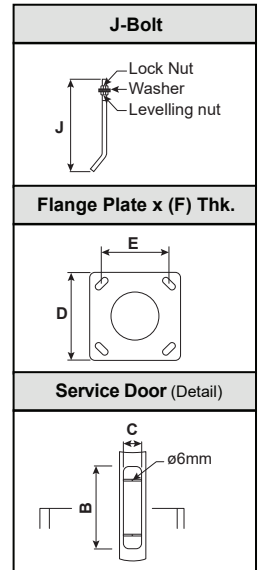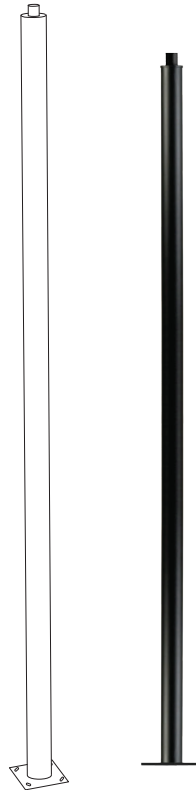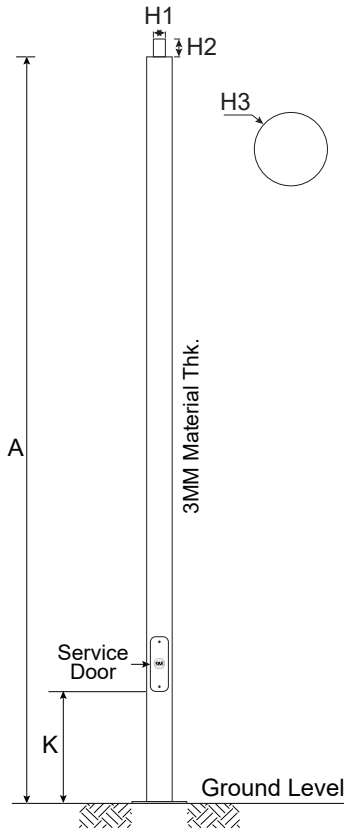

Height	Service Door		Flange Plate	J-Bolt	Grd. Lvl. to Service Door	Diameter		
	B	C	D x E x (F) THK.	J		H1	H2	H3
A	B	C	MM	MM	MM	MM	MM	MM
Meter	MM	MM	MM	MM	MM	MM	MM	MM
3	300	100	275x195x8	ø16x280 (L)	600	ø60/ø76	89	ø127
4	300	100	275x195x8	ø16x280 (L)	600	ø60/ø76	89	ø127
5	300	100	275x195x10	ø16x280 (L)	600	ø60/ø76	89	ø127
6	300	100	300x220x10	ø20x450 (L)	600	ø60/ø76	89	ø127

Square Aluminium Pole

Application




Pedestrian walkway, car park, garden light, area light and others.

Housing Material

Extrusion aluminum AA 6063-T5.

Finishing

Durable outdoor powder coated.

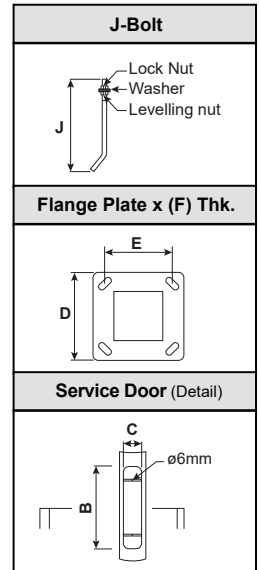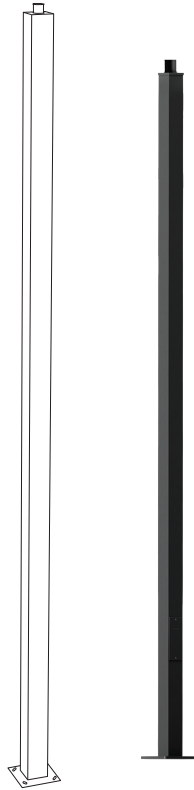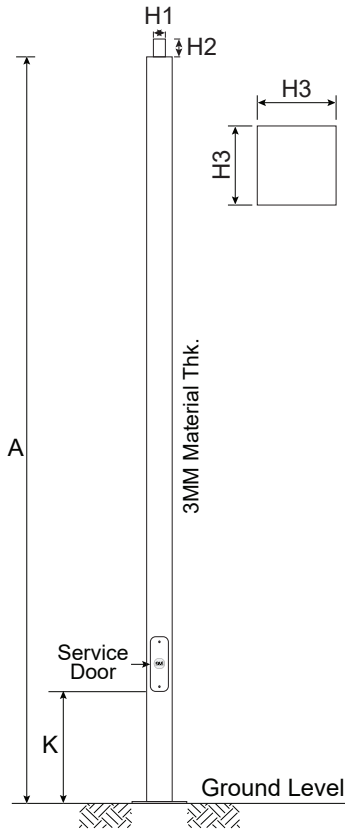

Height	Service Door		Flange Plate	J-Bolt	Grd. Lvl. to Service Door	Diameter		
	B	C	D x E x (F) THK.	J		H1	H2	H3
A	B	C	MM	MM	MM	MM	MM	MM
Meter	MM	MM	MM	MM	MM	MM	MM	MM
3	300	100	275x195x8	ø16x280 (L)	600	ø60/ø76	89	127x127
4	300	100	275x195x8	ø16x280 (L)	600	ø60/ø76	89	127x127
5	300	100	275x195x10	ø16x280 (L)	600	ø60/ø76	89	127x127
6	300	100	300x220x10	ø20x450 (L)	600	ø60/ø76	89	127x127

Rectangular Aluminium Pole

Application



Pedestrian walkway, car park, garden light, area light and others.

Housing Material

Extrusion aluminum AA 6063-T5.

Finishing

Durable outdoor powder coated.

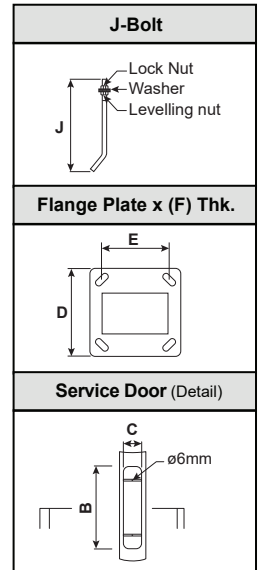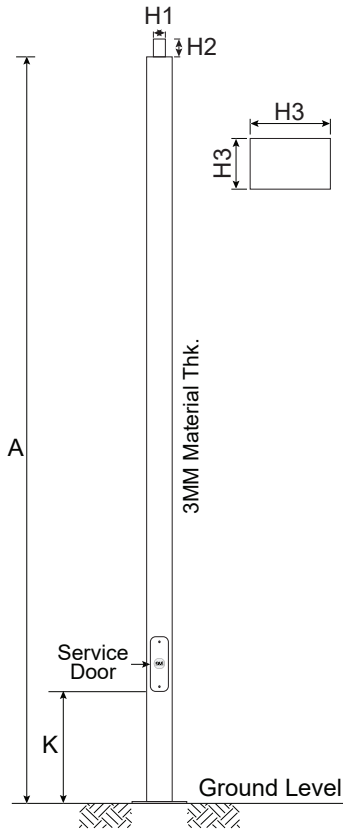

Height	Service Door		Flange Plate	J-Bolt	Grd. Lvl. to Service Door	Diameter		
	B	C	D x E x (F) THK.	J		H1	H2	H3
A	B	C	MM	MM	MM	MM	MM	MM
Meter	MM	MM	MM	MM	MM	MM	MM	MM
3	250	104	300x220x8	ø16x280 (L)	600	ø60/ø76	89	90x150
4	250	104	300x220x8	ø16x280 (L)	600	ø60/ø76	89	90x150
5	250	104	300x220x10	ø16x280 (L)	600	ø60/ø76	89	90x150
6	250	104	300x220x10	ø20x450 (L)	600	ø60/ø76	89	90x150